


## HFC Product Accessories

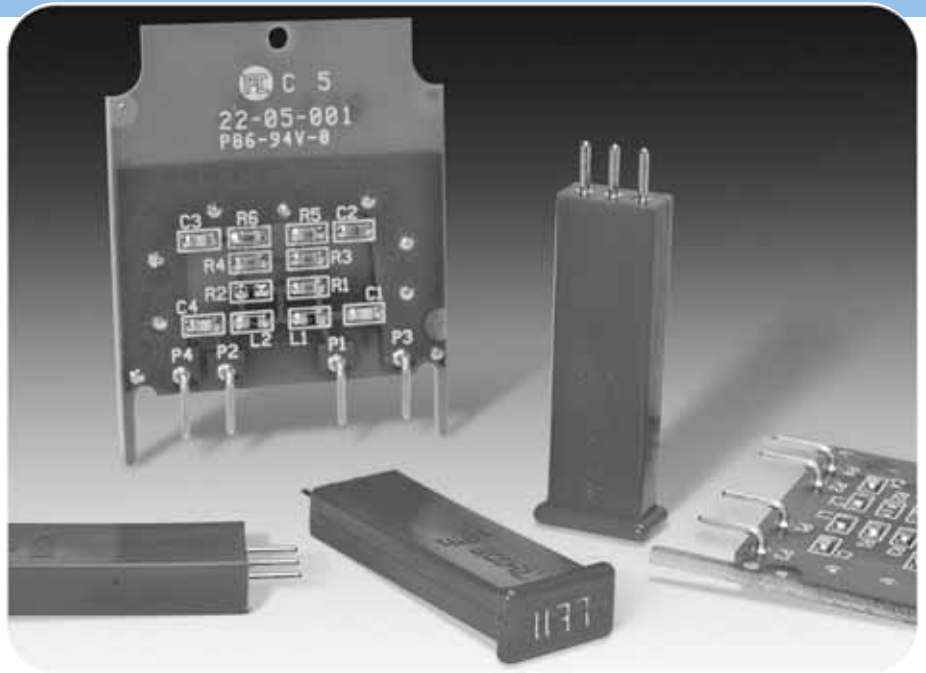

- **Tested and designed specifically for C-COR products by C-COR engineers**
- **C-COR accessories are designed for full functionality over operating temperature**
- **Product warranties are applicable exclusively to C-COR authorized accessories**

C-COR offers a full complement of plug-in accessories for our strand-mount, cabinet-mount, and rack-mount transmission and distribution equipment. In most cases, these plug-in accessories can be shared across similar product lines.

Options include:

- forward and return attenuators (PADs)
- forward and return equalizers
- forward cable simulators
- input configuration modules
- output distribution accessories
- active and passive return channel modules
- diplexers
- automatic gain control modules
- control (signature correction) modules

The first table, Accessories By Product Line, provides a broad overview of the accessories available for each C-COR product. The second table, Accessories at a Glance, lists all accessories with a picture and basic information regarding the products it fits into. The sections that follow provide pictures and specifications for each product listed. Contact your C-COR sales professional if you do not see the C-COR broadband transmission or distribution product of interest.

Accessories by Product Line

Key: Available: ● Not Available: ○

Product Name	FWD PADs Attenuator	FWD EQ	Cable Simulators (Equivalents)	RTN PADs Attenuator	Noise Filter in RTN PAD	RTN EQ
<b>Rack-Mount</b>						
CHP Max5000 Dual Tx	Amini Short	EQ	○	○	○	○
CHP Max5000 Single Tx	9-A Short	○	○	○	○	○
<b>Strand-Mount</b>						
Opti Max4100	NPB	GEQL-1GHz, 870	○	NPB	●	○
Opti Max4000	NPB	NEQL-870	○	NPB	●	○
Opti Max3100	9-A, 10-A-L, Amini	GEQL-1GHz-xxx-1, 870	○	9-A, 10-A-L, Amini	●	○
Opti Max3000	9-A, 9-A-WC 10-A-L, 10-A-WC	7-TG862-WC	○	9-A, 9-A-WC 10-A-L, 10-A-WC	●	○
Opti Max1000	9-A, 9-A-WC 10-A-L, 10-A-WC	7-2E862/x-WC	○	9-A, 9-A-WC 10-A-L, 10-A-WC	●	○
Flex Max901E Trunk	NPB	SEQ-1G, SEQ-862, SEQ-750, GEQC-870 (O/P EQ)	SCS-1G, SCS-862, SCS-750	NPB	○	MEQ-42, 55, 65 MEQT-42, 55, 65
Flex Max901E Bridger	NPB	SEQ-1G, SEQ-862, SEQ-750	SCS-1G, SCS-862, SCS-750	NPB	○	MEQ-42, 55, 65 MEQT-42, 55, 65
Flex Max901 Trunk	NPB	SEQ-1G, SEQ-862 w/o cover SEQ-750 w/o cover	SCS-1G, SCS-862 w/o cover, SCS-750 w/o cover	NPB	○	MEQ-42, MEQT-42
Flex Max901 Bridger	NPB	SEQ-1G, SEQ-862 w/o cover SEQ-750 w/o cover	SCS-1G, SCS-862 w/o cover, SCS-750 w/o cover	NPB	○	MEQ-42, MEQT-42
Flex Max900 Trunk	SPB	SEQ-862, 750	SCS-862, 750	SPB, RPB	○	MEQ-42, 55, 65 MEQT-42, 55, 65
Flex Max900 Bridger	SPB	SEQ-862, 750	SCS-862, 750	SPB, RPB	○	MEQ-42, 55, 65 MEQT-42, 55, 65
Flex Max340	SPB	SEQ-862, 750	SCS-862, 750	SPB, RPB	○	MEQ-42, 55, 65 MEQT-42, 55, 65
Flex Max331	NPB	SEQ-1G, SEQ-862 w/o cover, SEQ-750 w/o cover	SCS-1G, SCS-862 w/o cover, SCS-750 w/o cover	NPB	○	MEQ-42, MEQT-42,
Flex Max330	NPB	SEQ-862 w/o cover, SEQ-750 w/o cover	SCS-862 w/o cover, SCS-750 w/o cover	NPB	●	MEQ-42, MEQT-42,
Flex Max320	9-A-WC, 10-A-WC	7-2E862/x-WC 7-2E862Cx-WC	○	9-A-WC, 10-A-WC	●	○
E900	SPB	SEQ-862, 750	SCS-862, 750	SPB, RPB	○	MEQ-42, 55, 65, 550 MEQT-42, 55, 65, 186, 550
E700	SPB	SEQ-862, 750	SCS-862, 750	SPB, RPB	○	MEQ-42, MEQT-42
Diamond Line 1 Trunk Amp	9-A-WC, 10-A-WC	7-2E862/xx-WC	7-2E862/Cxx-WC	9-A-WC, 10-A-WC	○	7-REF-WC
Diamond Line 2 Bridger Amp	9-A-WC, 10-A-WC	7-2E862/xx-WC	7-2E862/Cxx-WC	9-A-WC, 10-A-WC	○	7-REF-WC
Diamond Line 3 Line Extender	9-A-WC, 10-A-WC	7-2E862/xx-WC	7-2E862/Cxx-WC	9-A-WC, 10-A-WC	○	7-REF-WC
GNA/TNA	9-A	62E750/L, EDB	○	9-A	○	○
FlexNet 800	SPB	SEQ-862, 750	SCS-862, 750	SPB, RPB	○	MEQ-42 MEQT-42
FlexNet 700	SPB	SEQ-750	SCS-750	SPB, RPB	○	MEQ-42 MEQT-42
<b>Cabinet-Mount</b>						
Opti Max2000	Amini	Amini	○	Amini	●	Amini
Opti Max1220	Amini	○	○	Amini	●	Amini
Flex Max500	Amini, Thermal Amini	E862/xx, A862/O E606/xx	CE862/x	Amini	●	Amini
Flex Max400	Amini, Thermal Amini	E862/xx, A862/O E606/xx	CE862/x	Amini	●	Amini
Flex Max222	Amini, Thermal Amini	Amini	○	Amini	●	Amini
Flex Max220 basic	Amini, Thermal Amini	Amini	○	Amini	●	Amini
Flex Max220 plus	Amini, Thermal Amini	E862/xx, E606/xx	CE862/x	Amini	●	Amini
<b>RF Passives</b>						
LS-FEQR-1GHz-EQxx	○	○	○	Amini Short	○	○
LS-FEQR-862	○	○	○	Amini Short	○	○
LS-FEQR-750	○	○	○	Amini Short	○	○
LS-FTERMR-42	○	○	○	Amini Short	○	○

## Accessories by Product Line Continued...

Key: Available: ● Not Available: ○

Product Name	Input Config. Module	Output Dist. Accessory	Return Ch.	Diplexers	AGC Module	Control Module
<b>Rack-Mount</b>						
CHP Max5000 Dual Forward Tx	○	○	○	○	○	○
CHP Max5000 Dual Forward Tx	○	○	○	○	○	○
<b>Strand Mount</b>						
Opti Max4100	○	○	○	○	○	○
Opti Max4000	○	○	○	○	○	○
Opti Max3100	○	○	○	○	○	○
Opti Max3000	○	○	○	○	○	○
Opti Max1000	○	○	○	○	○	○
Flex Max901E Trunk	○	S-Series	○	○	○	○
Flex Max901E Bridger	○	S-Series	○	○	○	○
Flex Max901 Trunk	○	S-Series	○	○	○	○
Flex Max901 Bridger	○	S-Series	○	○	○	○
Flex Max900 Trunk	○	S-Series	○	○	○	○
Flex Max900 Bridger	○	S-Series	○	○	○	○
Flex Max340	○	○	○	○	○	○
Flex Max331	○	○	○	○	○	○
Flex Max330	○	○	○	○	○	○
Flex Max320	○	○	○	○	○	○
E900	○	S-Series	○	○	○	○
E700	○	○	○	○	○	○
Diamond Line 1 Trunk Amp	○	○	○	○	○	○
Diamond Line 2 Bridger Amp	○	○	○	○	○	○
Diamond Line 3 Line Extender	○	○	○	○	○	○
GNA/TNA	○	7-DC Splitter	○	○	○	○
FlexNet 800	○	S-Series	○	○	○	○
FlexNet 700	○	S-Series	○	○	○	○
<b>Cabinet Mount</b>						
Opti Max2000	○	○	○	D30/47, D42/54 D55/70, D65/85	○	CM862/xx or A862/0
Opti Max1220	○	7-DC-Series Splitter, Taps	○	D30/47, D42/54 D55/70, D65/85	○	○
Flex Max500	A862/00 (bridge) S3.5/3.5 or Tapxx/xx	A862/00 (bridge) S3.5/3.5 or Tapxx/xx	Active RCA3-Z Passive RCEQ-Z	D30/47, D42/54 D55/70, D65/85	○	CM862/xx or A862/0
Flex Max400	A862/00 (bridge) S3.5/3.5 or Tapxx/xx	A862/00 (bridge) S3.5/3.5 or Tapxx/xx	Active RCA3-Z Passive RCEQ-Z	D30/47, D42/54 D55/70, D65/85	AGC030/xxx.xx plus Amini	CM862/xx or A862/0
Flex Max222	○	7-DC-Series Splitter, Taps	○	○	○	○
Flex Max220 basic	○	○	○	○	○	○
Flex Max220 plus	○	○	○	D30/47, D42/54 D55/70, D65/85	○	○
<b>Feeder Line Equalizer</b>						
LS-FEQR-1GHz-EQxx	○	○	○	○	○	○
LS-FEQR-862	○	○	○	○	○	○
LS-FEQR-750	○	○	○	○	○	○
LS-FTERMR-42	○	○	○	○	○	○

## Accessories at a Glance

### PADs (Attenuators)

#### NPB-xxx Forward/Return Path PAD Attenuators

##### Product Usage

Opti Max4100, Opti Max4000, Flex Max331, Flex Max330, Flex Max901E, Flex Max901

##### Notes:

1. Height is 1.4", Pin Spacing is 0.125"
2. All in green plastic
3. Can be plugged into Legacy PBN products using 9-A Attenuators, but no guiding mechanism.
4. Same footprint as Amini Series PAD but may be limited by height constraints



#### SPB-xxx Forward/Return PAD Attenuator

##### Product Usage

Flex Max900, Flex Max340, E7xxx, E9xxx, FNT/FNB 700, FNT/FNB 800

##### Notes:

1. Height is 1.10", Pin Spacing is 0.20"
2. All in green plastic
3. SPB-0 can be used as a jumper in the distribution accessory location for a single output.



#### RPB-xxx Return PAD Attenuator

##### Product Usage

Flex Max900, Flex Max340, E7xxx, E9xxx, FNT/FNB 700, FNT/FNB 800

##### Notes:

1. Height is 1.10", Pin Spacing is 0.20"
2. All in red plastic



#### 9-A and 9-A-WC Forward/Return PAD Attenuators

##### Product Usage

Opti Max1000, Opti Max3100, Opti Max3000, Flex Max320, Diamond Line 1, 2, 3, (9-A-WC only)  
GNA/TNA, CHP Max5000 single input TX (9-A only)

##### Notes:

1. Pin Spacing is 0.125"
2. 9-A-WC has a partial blue plastic cover with guides
3. Cannot be plugged into products using NPB style PADs due to incompatible guiding mechanisms.
4. Same footprint as Amini Series PAD but may be limited by height constraints. Zero value is possible exception due to performance.
5. The blue cover can be removed from the 9-A-WC allowing usage in 9-A locations but may be limited by height constraints



#### 10-A-L and 10-A-WC Forward/Return PAD Attenuators

##### Product Usage

Opti Max1000, Opti Max3100 (10-A-L only), Opti Max3000, Flex Max320, Diamond Line 1, 2, 3

##### Notes:

1. Height is 1.15", Pin Spacing is 0.125"
2. 10-A-L has a blue plastic cover without guides and 10-A-WC has a blue plastic cover with guides.
3. Cannot be plugged into products using NPB style PAD, due to incompatible guiding mechanisms.
4. Same footprint as Amini Series PAD but may be limited by height constraints. Zero value is possible exception due to performance.



#### Amini PAD Attenuators

##### Product Usage

Opti Max3100, Opti Max2000, Flex Max500, Flex Max400, Flex Max220, Flex Max200, I-FLEX, FEQR-xx, FTERM-xx

##### Notes:

1. Height is 1.0", Pin Spacing is 0.125".
2. All in orange plastic.
3. Can be plugged into Legacy PBN products using 9-A Attenuators, but no guiding mechanism.
4. Same footprint as NPB and 9-A Series but may be limited by height constraints.
5. Replaces IPB style PADs (AT0xxx).



## PADs (Attenuators)

### Amini Short PAD Attenuators

#### Product Usage

CHP Max5000 Dual Output Transmitters

#### Notes:

1. Height is ", Pin Spacing is 0.125".
2. All in orange plastic.
3. Same footprint as NPB and 9-A Series but may be limited by height constraints.



### Thermal Amini PAD Attenuators

#### Product Usage

Opti Max2000, Flex Max500, Flex Max400, Flex Max220, Flex Max200, I-FLEX

#### Notes:

1. Height is 1.0", Pin Spacing is 0.125".
2. All in white plastic.
3. Can be plugged into Legacy PBN products using 9-A Attenuators, but no guiding mechanism.
4. Same footprint as NPB and 9-A Series but may be limited by height constraints.



### Thermal PAD Attenuators

#### Product Usage

Flex Max320

#### Notes:

5. All in blue plastic.



### SEQPB-xx EQ Form Factor PAD Attenuators

#### Product Usage

Flex Max901, Flex Max331, Flex Max330, Flex Max340, Flex Max900, E7xxx, E9xxx, FNT/FNB 700, FNT/FNB 800

#### Notes:

1. Plugs into the equalizer location to add flat attenuation across the passband.



## Bridge and A862 Attenuators

### A862/0 Bridge

#### Product Usage

Flex Max500, Flex Max400

#### Notes:

1. Blue plastic cover to protect components.
2. Can be inserted into not only the Forward PAD location, but also the Input/Output Configuration Module locations.



## Noise Filter

### Noise Filter

#### Product Usage

Opti Max4100, Opti Max4000, Opti Max3100, Opti Max3000, Opti Max2000, Opti Max1000,  
Opti Max1220, Flex Max500, Flex Max400, Flex Max330, Flex Max331, Flex Max320, Flex Max222,  
Flex Max220 basic, Flex Max220 plus

#### Notes:

1. Height is 1.182", Pin Spacing is 0.125".
2. Accessory for return attenuator (PAD) plug-in locations.
3. In some cases, the ingress filter may have to be inserted or removed with needlenose pliers.



## Plug-In Equalizers

### GEQL-1GHZ-xxx Linear Equalizers

#### Product Usage

Opti Max4100, Flex Max901E (trunk only)

#### Notes:

1. Height is 1.4", Symmetrical Pin Spacing
2. All in red plastic
3. Can be plugged into NPB or 9-A style sockets
4. 1 GHz "red" Eq's can be used for 870 MHz bandwidth if the losses are acceptable



### GEQL-1GHZ-xxx-1 Linear Equalizers

#### Product Usage

Opti Max3100

#### Notes:

1. Height is 1.0", Symmetrical Pin Spacing
2. All in red plastic
3. Can be plugged into NPB or 9-A style sockets
4. 1 GHz "red" Eq's can be used for 870 MHz bandwidth if the losses are acceptable



### GEQL-870-xxx Linear Equalizers

#### Product Usage

Opti Max4100

#### Notes:

1. Height is 1.4", Symmetrical Pin Spacing
2. All in purple plastic



### GEQL-870-xxx-1 Linear Equalizers

#### Product Usage

Opti Max3100

#### Notes:

1. Height is 1.0", Symmetrical Pin Spacing
2. All in purple plastic



### NEQL-870-xx Linear Equalizers

#### Product Usage

Opti Max4000

#### Notes:

1. Height is 1.4", Non-symmetrical Pin Spacing
2. All in yellow plastic



### SEQ-1GHz-xx Cable Equalizers

#### Product Usage

Opti Max4100, Flex Max901E, Flex Max901, Flex Max331

#### Note:

1. Cannot be plugged into FM330 or Legacy C-COR Amps due to PCB guiding mechanism



### GEQC-870-xxx Cable Equalizers

#### Product Usage

Flex Max901E (trunk only)

#### Note:

1. Needed to configure for an 870MHz system in the Flex Max901E Trunk.
2. Height is 1.4"
3. All in blue plastic



### GEQC-1GHZ-xxx Cable Equalizers

#### Product Usage

Flex Max901E (trunk only)

#### Note:

1. Needed to configure for an 870MHz system in the Flex Max901E Trunk.
2. Height is 1.4"
3. All in brown plastic



## Plug-In Equalizers Continued

### SEQ862-xx Cable Equalizers

#### Product Usage

Flex Max901E, Flex Max901, Flex Max900, Flex Max340, Flex Max331, Flex Max330, FNT/FNB 800

#### Note:

1. Legacy C-COR.
2. This product was previously available with a cover, and this covered version is not usable in the Flex Max901, Flex Max331, and Flex Max330.



### 7-2E862/x-WC Forward Path Cable Equalizers

#### Product Usage

Opti Max1000, Opti Max3000, Flex Max320, Diamond Line 1, Diamond Line 2

#### Notes:

1. Legacy Philips
2. All versions have protective cover to protect components.



### E862/xx Series Cable Equalizers

#### Product Usage

Flex Max500, Flex Max400, Flex Max220 Plus

#### Notes:

1. All versions have a blue plastic cover to protect components.



### 7-TG862-WC Linear Tilt Equalizers

#### Product Usage

Opti Max1000, Opti Max3000, Flex Max320, Diamond Line 1, Diamond Line 2

#### Notes:

1. Legacy Philips.
2. All versions have a blue cover to protect components.



### SEQ750-xx Cable Equalizers

#### Product Usage

Flex Max901E, Flex Max901, Flex Max900, Flex Max340, Flex Max331, Flex Max330, E7xxx, E9xxx, FNT/FNB700, FNT/FNB800

#### Notes:

1. Legacy C-COR.
2. Were produced with and without a cover.
3. Fits in the Flex Max901, Flex Max331, and Flex Max330 only without the cover.



### E606-xx Cable Equalizers

#### Product Usage

Flex Max500, Flex Max400, Flex Max220 Plus

#### Notes:

1. All in blue plastic.

Picture Coming Soon

### 7-REFxx/x-WC Return Cable Equalizers

#### Product Usage

Flex Max320, Diamond Line 1, Diamond Line 2

#### Notes:

1. Legacy Philips.
2. All versions have a blue cover to protect components.



## Cable Simulators and Cable Equivalents

---

### SCS-1G-xx Cable Simulators

#### Product Usage

Opti Max4100, Flex Max901E, Flex Max901, Flex Max331

#### Note:

1. Cannot be plugged into FM330 or Legacy C-COR Amps due to PCB guiding mechanism.



### SCS862-xx Cable Simulators

#### Product Usage

Flex Max901E, Flex Max901, Flex Max900, Flex Max340, Flex Max331, Flex Max330, E9xxx, FNT/FNB 800

#### Note:

1. Legacy C-COR.
2. Were produced with and without a cover.
3. Fits in the Flex Max901, Flex Max331, and Flex Max330, only without the cover.



### 7-2E862/Cx-WC Forward Path Cable Simulators

#### Product Usage

Opti Max1000, Opti Max3000, Flex Max320, Diamond Line 1, Diamond Line 2

#### Notes:

1. Legacy Philips.
2. All versions have protective cover to protect components.



### SCS750-xx Cable Simulators

#### Product Usage

Flex Max901E, Flex Max901, Flex Max900, Flex Max340, Flex Max331, Flex Max330, E7xxx, E9xxx, FNT/FNB800, FNT/FNB700

#### Notes:

1. Legacy C-COR.
2. Were produced with and without a cover.
3. Fits in the Flex Max901, Flex Max331, and Flex Max330 only without the cover.



### CE862/xx Cable Simulators (Equivalents)

#### Product Usage

Flex Max500, Flex Max400

#### Notes:

1. All versions have a blue plastic cover to protect components.



## Input/Output Configuration Modules

### Splitter

Product Usage

Flex Max500, Flex Max400

Notes:

1. All versions have a blue plastic cover to protect components.
- 2.



### Taps

Product Usage

Flex Max500, Flex Max400

Notes:

1. All versions have a blue plastic cover to protect components.



### 7-DC-x-5-870-WC Splitters and Directional Couplers (TAPs)

Product Usage

Opti Max1220, Flex Max222

Notes:

1. All versions have a blue cover to protect components and insertion guides.



## Output Distribution Accessories

### SS/SDC-1000-xx Distribution Accessories

Product Usage

Flex Max901E Flex Max901, Flex Max900, E900, FlexNet 700, FlexNet 800

Notes:

1. Legacy C-COR
2. All versions have a white plastic cover to protect components.



## Diplex Filters

### Diplexers

Product Usage

Opti Max2000, Flex Max500, Flex Max400, Flex Max220 Plus

Notes:

1. All versions have a blue plastic cover to protect components



## Active and Passive Return Channel

### RCA3-Z Active Return Channel

Product Usage

Flex Max500, Flex Max400

Notes:

1. Aminis are plugged into the 3 slots.
2. Shown upside-down.



### RCEQ-Z Passive Return Channel

Product Usage

Flex Max500, Flex Max400

Notes:

1. All versions have a blue cover to protect components.



## Automatic Gain Control (AGC) Module

### AGC030/xxx.xx AGC Module

Product Usage

Flex Max400

Notes:

1. Aminis are plugged into the slot.



## Control Module

### CM862/xx Control Module

Product Usage

Opti Max2000, Flex Max500, Flex Max400

Notes:

1. Aminis are plugged into the 3 slots.
2. Shown upside-down.



## PADs (Attenuators)

PADs provide flat loss attenuation of RF signal across the entire passband. They are used in conjunction with equalizers to achieve proper amplifier forward output levels and return input levels. These PADs also have a fixed insertion loss regardless of frequency. SEQPB series PADs are PADs on an equalizer footprint and only work in the forward path. Amini series attenuators can be used in cabinet-mount equipment as both an attenuator and an equalizer depending upon the plug-in location.

### NPB Series Cable Attenuators (PADs)



P/N	5–1002 MHz Flat Loss (dB)	Passband Flatness (dB)	P/N	5–1002 MHz Flat Loss (dB)	Passband Flatness (dB)
NPB-000	0.0	±0.2	NPB-110	11.0	±0.3
NPB-010	1.0	±0.3	NPB-120	12.0	±0.3
NPB-020	2.0	±0.3	NPB-130	13.0	±0.3
NPB-030	3.0	±0.3	NPB-140	14.0	±0.3
NPB-040	4.0	±0.3	NPB-150	15.0	±0.4
NPB-050	5.0	±0.3	NPB-160	16.0	±0.4
NPB-060	6.0	±0.3	NPB-170	17.0	±0.4
NPB-070	7.0	±0.3	NPB-180	18.0	±0.4
NPB-080	8.0	±0.3	NPB-190	19.0	±0.4
NPB-090	9.0	±0.3	NPB-200	20.0	±0.4
NPB-100	10.0	±0.3	NPB-750	terminator	—

Impedance: 75Ω

Temperature Range: -40 to 85°C

Return Loss: 20dB

Flatness measured relative to a straight line at the listed dB value.

All in green plastic

Specification Document Number 601263 Rev B

Specifications subject to change without notice

**SPB Series Cable Attenuators (PADs)**



Model	P/N	5–1002 MHz Flat Loss (dB)	Model	P/N	5–1002 MHz Flat Loss (dB)	Model	P/N	Flat Loss (dB)
SPB-0	162260-00	0.0	SPB-7	162260-07	7.0	SPB-14	162260-14	14.0
SPB-0.5	162260-005	0.5	SPB-7.5	162260-075	7.5	SPB-14.5	162260-145	14.5
SPB-1	162260-01	1.0	SPB-8	162260-08	8.0	SPB-15	162260-15	15.0
SPB-1.5	162260-015	1.5	SPB-8.5	162260-085	8.5	SPB-15.5	162260-155	15.5
SPB-2	162260-02	2.0	SPB-9	162260-09	9.0	SPB-16	162260-16	16.0
SPB-2.5	162260-025	2.5	SPB-9.5	162260-095	9.5	SPB-16.5	162260-165	16.5
SPB-3	162260-03	3.0	SPB-10	162260-10	10.0	SPB-17	162260-17	17.0
SPB-3.5	162260-035	3.5	SPB-10.5	162260-105	10.5	SPB-17.5	162260-175	17.5
SPB-4	162260-04	4.0	SPB-11	162260-11	11.0	SPB-18	162260-18	18.0
SPB-4.5	162260-045	4.5	SPB-11.5	162260-115	11.5	SPB-18.5	162260-185	18.5
SPB-5	162260-05	5.0	SPB-12	162260-12	12.0	SPB-19	162260-19	19.0
SPB-5.5	162260-055	5.5	SPB-12.5	162260-125	12.5	SPB-19.5	162260-195	19.5
SPB-6	162260-06	6.0	SPB-13	162260-13	13.0	SPB-20	162260-20	20.0
SPB-6.5	162260-065	6.5	SPB-13.5	162260-135	13.5	SPB Term.	162260-99	—

Passband Flatness: 0.3 dB, P–V

Specification Document Number 600437 Rev C

Return Loss: 19 dB

All in green plastic

Specifications subject to change without notice

**RPB Series Cable Attenuators (PADs)**



Model	P/N	5–200 MHz Flat Loss (dB)
RPB-21	162467-21	21.0
RPB-22	162467-22	22.0
RPB-23	162467-23	23.0
RPB-24	162467-24	24.0
RPB-25	162467-25	25.0

Passband Flatness: ±0.3 dB

Specification Document Number 600701 Rev A

Return Loss I/O: 25 dB

All in red plastic

Note:

1. Reverse SPB-style PAD

Specifications subject to change without notice

**SEQPB Series Cable Attenuators (PADs)**



Model	P/N	5–1002 MHz Flat Loss (dB)	Model	P/N	5–1002 MHz Flat Loss (dB)
SEQPB-1000-01	162335-01	1.0	SEQPB-1000-06	162335-06	6.0
SEQPB-1000-1.5	162335-15	1.5	SEQPB-1000-07	162335-07	7.0
SEQPB-1000-02	162335-02	2.0	SEQPB-1000-08	162335-08	8.0
SEQPB-1000-03	162335-03	3.0	SEQPB-1000-09	162335-09	9.0
SEQPB-1000-04	162335-04	4.0	SEQPB-1000-10	162335-10	10.0
SEQPB-1000-05	162335-05	5.0			

Passband Flatness: ±0.3 dB

Specification Document Number 600668 Rev F

Return Loss: 19 dB (SEQPB-01 to SEQPB-06)/18.5 dB (SEQPB-07 to SEQPB-10)

Tolerance: ±0.5 dB of nominal value

Slope: –0.2 to –0.7 dB

Specifications subject to change without notice

## 9-A/9-A-WC Series Cable Attenuators (PADs)




Model	P/N	5–1002MHz Flat Loss (dB)	Passband Flatness (dB)	Model	P/N	5–1002MHz Flat Loss (dB)	Passband Flatness (dB)
9-A0	2500505	0.0	±0.5	9-A0-WC	2500584	0.0	±0.5
9-A0.5	2500698	0.5	±0.1	9-A0.5-WC	2500585	0.5	±0.1
9-A1	2500856	1.0	±0.1	9-A1-WC	2500586	1.0	±0.1
9-A1.5	2500699	1.5	±0.1	9-A1.5-WC	2500587	1.5	±0.1
9-A2	2500857	2.0	±0.2	9-A2-WC	2500588	2.0	±0.2
9-A2.5	2500700	2.5	±0.2	9-A2.5-WC	2500589	2.5	±0.2
9-A3	2500858	3.0	±0.2	9-A3-WC	2500590	3.0	±0.2
9-A3.5	2500701	3.5	±0.2	9-A3.5-WC	2500591	3.5	±0.2
9-A4	2500859	4.0	±0.2	9-A4-WC	2500592	4.0	±0.2
9-A4.5	2500702	4.5	±0.2	9-A4.5-WC	2500593	4.5	±0.2
9-A5	2500860	5.0	±0.2	9-A5-WC	2500594	5.0	±0.2
9-A5.5	2500703	5.5	±0.2	9-A5.5-WC	2500595	5.5	±0.2
9-A6	2500861	6.0	±0.2	9-A6-WC	2500596	6.0	±0.2
9-A6.5	2500704	6.5	±0.2	9-A6.5-WC	2500597	6.5	±0.2
9-A7	2500705	7.0	±0.2	9-A7-WC	2500598	7.0	±0.2
9-A7.5	2500706	7.5	±0.2	9-A7.5-WC	2500599	7.5	±0.2
9-A8	2500707	8.0	±0.2	9-A8-WC	2500600	8.0	±0.2
9-A8.5	2500708	8.5	±0.2	9-A8.5-WC	2500601	8.5	±0.2
9-A9	2500862	9.0	±0.2	9-A9-WC	2500602	9.0	±0.2
9-A9.5	2500709	9.5	±0.2	9-A9.5-WC	2500603	9.5	±0.2
9-A10	2500710	10.0	±0.2	9-A10-WC	2500604	10.0	±0.2
9-A10.5	2500711	10.5	±0.2	9-A10.5-WC	2500605	10.5	±0.2
9-A11	2500712	11.0	±0.2	9-A11-WC	2500606	11.0	±0.2
9-A11.5	2500713	11.5	±0.2	9-A11.5-WC	2500607	11.5	±0.2
9-A12	2500863	12.0	±0.2	9-A12-WC	2500608	12.0	±0.2
9-A12.5	2500714	12.5	±0.2	9-A12.5-WC	2500609	12.5	±0.2
9-A13	2500715	13.0	±0.2	9-A13-WC	2500610	13.0	±0.2
9-A13.5	2500716	13.5	±0.2	9-A13.5-WC	2500611	13.5	±0.2
9-A14	2500717	14.0	±0.2	9-A14-WC	2500612	14.0	±0.2
9-A14.5	2500718	14.5	±0.2	9-A14.5-WC	2500613	14.5	±0.2
9-A15	2500864	15.0	±0.2	9-A15-WC	2500614	15.0	±0.2
9-A15.5	2500719	15.5	±0.2	9-A15.5-WC	2500615	15.5	±0.2
9-A16	2500720	16.0	±0.2	9-A16-WC	2500616	16.0	±0.2
9-A16.5	2500721	16.5	±0.2	9-A16.5-WC	2500617	16.5	±0.2
9-A17	2500722	17.0	±0.2	9-A17-WC	2500618	17.0	±0.2
9-A17.5	2500723	17.5	±0.2	9-A17.5-WC	2500619	17.5	±0.2
9-A18	2500865	18.0	±0.2	9-A18-WC	2500620	18.0	±0.2
9-A18.5	2500724	18.5	±0.2	9-A18.5-WC	2500621	18.5	±0.2
9-A19	2500725	19.0	±0.2	9-A19-WC	2500622	19.0	±0.2
9-A19.5	2500726	19.5	±0.2	9-A19.5-WC	2500623	19.5	±0.2
9-A-TERM	2500847	terminator	—	9-A-TERM-WC	2500848	terminator	—

Return Loss @ 1000MHz: 20dB

Specification Document Number 871371 Rev D

**10-A-L Series Cable Attenuators (PADs)**



Model	P/N	5–1002 MHz Flat Loss (dB)	Passband Flatness (dB)	Model	P/N	5–1002 MHz Flat Loss (dB)	Passband Flatness (dB)
10-A0.0-L	2501042	0.0	±0.5	10-A0.0-WC	2500987	0.0	±0.5
10-A1.0-L	2501044	1.0	±0.1	10-A1.0-WC	2501031	1.0	±0.1
10-A2.0-L	2501046	2.0	±0.2	10-A2.0-WC	2501032	2.0	±0.2
10-A3.0-L	2501048	3.0	±0.2	10-A3.0-WC	2500989	3.0	±0.2
10-A4.0-L	2501050	4.0	±0.2	10-A4.0-WC	2501035	4.0	±0.2
10-A5.0-L	2501052	5.0	±0.2	10-A5.0-WC	2501036	5.0	±0.2
10-A6.0-L	2501054	6.0	±0.2	10-A6.0-WC	2501001	6.0	±0.2
10-A7.0-L	2501056	7.0	±0.2	10-A7.0-WC	2501039	7.0	±0.2
10-A8.0-L	2501058	8.0	±0.2	10-A8.0-WC	2501040	8.0	±0.2
10-A9.0-L	2501060	9.0	±0.2	10-A9.0-WC	2501003	9.0	±0.2
10-A10.0-L	2501062	10.0	±0.2	10-A10.0-WC	2501005	10.0	±0.2
10-A11.0-L	2501064	11.0	±0.2	10-A11.0-WC	2501007	11.0	±0.2
10-A12.0-L	2501066	12.0	±0.2	10-A12.0-WC	2501009	12.0	±0.2
10-A13.0-L	2501068	13.0	±0.2	10-A13.0-WC	2501011	13.0	±0.2
10-A14.0-L	2501070	14.0	±0.2	10-A14.0-WC	2501013	14.0	±0.2
10-A15.0-L	2501072	15.0	±0.2	10-A15.0-WC	2501015	15.0	±0.2
10-A16.0-L	2501074	16.0	±0.2	10-A16.0-WC	2501017	16.0	±0.2
10-A17.0-L	2501076	17.0	±0.2	10-A17.0-WC	2501019	17.0	±0.2
10-A18.0-L	2501078	18.0	±0.2	10-A18.0-WC	2501021	18.0	±0.2
10-A19.0-L	2501080	19.0	±0.2	10-A19.0-WC	2501023	19.0	±0.2
10-A20.0-L	2501086	20.0	±0.2	10-A20.0-WC	2501025	20.0	±0.2
10-A21.0-L	2501081	21.0	±0.2	10-A21.0-WC	2501027	21.0	±0.2
10-A22.0-L	2501141	22.0	±0.2	10-A22.0-WC	2501151	22.0	±0.2
10-A23.0-L	2501142	23.0	±0.2	10-A23.0-WC	2501152	23.0	±0.2
10-A24.0-L	2501143	24.0	±0.2	10-A24.0-WC	2501153	24.0	±0.2
10-A25.0-L	2501144	25.0	±0.2	10-A25.0-WC	2501154	25.0	±0.2
10-A26.0-L	2501145	26.0	±0.2	10-A26.0-WC	2501155	26.0	±0.2

Return Loss @ 1000MHz: 20dB

Specification Document Number 871371 Rev D

Specifications subject to change without notice

## Amini



Model	P/N	Atten. 5–862 MHz Flat Loss in dB	Forward Path EQ, 65/85 MHz		EQ Value in dB	Return Path EQ, 65/85 MHz		EQ Value in dB
			Insertion Loss in dB at Frequency (MHz)			Insertion Loss in dB at Frequency (MHz)		
			85	862		5	65	
Amini-0	PH0.31401	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Amini-1	PH0.31851	1.0	.98	.23	.75	.99	.03	.96
Amini-2	PH0.31411	2.0	1.92	.40	1.52	1.97	.04	1.93
Amini-3	PH0.31861	3.0	2.87	.51	2.36	2.94	.06	2.88
Amini-4	PH0.31421	4.0	4.06	.56	3.50	4.16	.08	4.08
Amini-5	PH0.31871	5.0	4.81	.59	4.22	4.90	.09	4.81
Amini-6	PH0.31431	6.0	5.82	.62	5.20	5.95	.10	5.85
Amini-7	PH0.31881	7.0	6.67	.62	6.05	6.84	.11	6.73
Amini-8	PH0.31441	8.0	7.67	.62	7.05	7.83	.12	7.71
Amini-9	PH0.31891	9.0	8.58	.60	7.98	8.80	.13	8.67
Amini-10	PH0.31451	10.0	9.49	.59	8.90	9.73	.14	9.59
Amini-11	PH0.31901	11.0	10.40	.60	9.80	10.68	.14	10.54
Amini-12	PH0.31461	12.0	11.34	.58	10.76	11.61	.15	11.46
Amini-13	PH0.31911	13.0	12.26	.56	11.70	12.57	.15	12.42
Amini-14	PH0.31471	14.0	13.11	.55	12.56	13.42	.16	13.26
Amini-15	PH0.31921	15.0	13.99	.55	13.44	14.30	.16	14.14
Amini-16	PH0.31481	16.0	14.88	.61	14.27	15.18	.17	15.01
Amini-17	PH0.31931	17.0	—	—	—	—	—	—
Amini-18	PH0.31491	18.0	—	—	—	—	—	—
Amini-19	PH0.31941	19.0	—	—	—	—	—	—
Amini-20	PH0.31951	20.0	—	—	—	—	—	—

All in orange plastic

Note:

- Amini plug-ins can be used as both PADs and EQs in the Forward Path in the Flex Max220 Basic and Flex Max222 Amplifiers

Specifications subject to change without notice

## Amini Short



P/N	PAD Value	P/N	PAD Value	P/N	PAD Value	P/N	PAD Value
1300453	0.0	1300467	6.0	1300481	12.0	KP010463	18.0
1300454	0.5	1300469	6.5	KP010319	12.5	KP010464	18.5
1300455	1.0	1300471	7.0	KP010320	13.0	KP010465	19.0
1300456	1.5	1300472	7.5	KP010321	13.5	KP010466	19.5
1300457	2.0	1300473	8.0	KP010322	14.0	KP010467	20.0
1300458	2.5	1300474	8.5	KP010323	14.5	KP010468	20.5
1300459	3.0	1300475	9.0	KP010457	15.0	KP010469	21.0
1300460	3.5	1300476	9.5	KP010458	15.5	KP010470	21.5
1300461	4.0	1300477	10.0	KP010459	16.0	KP010471	22.0
1300462	4.5	1300478	10.5	KP010460	16.5	KP010472	22.5
1300463	5.0	1300479	11.0	KP010461	17.0	KP010473	23.0
1300464	5.5	1300480	11.5	KP010462	17.5		

All in orange plastic

Note:

- Amini Shorts are used in the CHP Max5000 Dual Input Transmitter and should be inserted with needle-nose pliers.

Specifications subject to change without notice

### Thermal Amini



Model	P/N	Model	P/N	Model	P/N
TAmini-0		TAmini-6	KF512127 6dB	TAmini-12	KF512133 12dB
TAmini-1	KF512122 1dB	TAmini-7	KF512128 7dB	TAmini-13	
TAmini-2	KF512123 2dB	TAmini-8	KF512129 8dB	TAmini-14	
TAmini-3	KF512124 3dB	TAmini-9	KF512130 9dB	TAmini-15	
TAmini-4	KF512125 4dB	TAmini-10	KF512131 10dB		
TAmini-5	KF512126 5dB	TAmini-11	KF512132 11dB		

All in white plastic

Specifications subject to change without notice

### Thermal PAD



P/N	PAD Value
0707424-801	3dB

All in blue plastic

Specifications subject to change without notice

### A862



Model	P/N	PAD Value	Flatloss 5-862 MHz	Passband Flatness
Bridge (A862/0)	PH0.40071	0	0	±0.15 dB
A862/02	PH0.40081	2	2	±0.15 dB
A862/04	PH0.40091	4	4	±0.15 dB
A862/05	PH0.41391	5	5	±0.15 dB
A862/06	PH1.40101	6	6	±0.15 dB
A862/08	PH0.40111	8	8	±0.15 dB
A862/10	PH0.40121	10	10	±0.15 dB

Dimensions, L x H: 30 x 37.7 mm

All in blue Plastic.

Specifications subject to change without notice.

## Noise Filter

The Return Ingress Noise Filter is a new C-COR RF accessory for return attenuator (PAD) plug-in locations. This new accessory not only suppresses signals below 10MHz with at least 30dB of attenuation but also passes signals above 15MHz with minimal insertion loss. Ingress noise represents one of the major disturbances that affect upstream data transmission in broadband networks. This high pass filter prevents narrowband AM modulation carriers, such as short-wave radio signals, and any other interference from being introduced into the return path via an external source. Managing ingress noise in the return plant is crucial for data carrier performance, especially in broadband networks in which the return path is increasingly used for advanced services including video on demand and voice over IP. The new C-COR Return Ingress Noise Filter is a small, simple, yet vital component for implementing these services.



### KF112993 Return Ingress Noise Filter

RF impedance, $\Omega$	75
<b>Pass Band</b>	
Bandwidth, MHz	15–200
Insertion Loss, dB	
15–20MHz	< 1.50
20–200MHz	< 1.00
Return Loss, dB	$\leq -18$
<b>Stop Band</b>	
Bandwidth, MHz	5–10
Attenuation, dB	$\geq 30$
<b>Physical and Environmental Characteristics</b>	
Dimensions (w x h x d), mm	11 x 30 x 5
Connector	3 pin plug-in
Temperature, $^{\circ}\text{C}$	-40 to 85
Humidity, % Relative Humidity	5–95

Specification Document Number KR012940

Note:

1. In some cases, the ingress filter may have to be inserted or removed with needlenose pliers
2. Contact your C-COR sales professional regarding the new Return Ingress Noise Filter

Specifications subject to change without notice

## Plug-in Equalizers

Plug-in equalizers are available as either linear equalizers or cable equalizers, both of which provide attenuation of RF signals with the greatest attenuation occurring at the lowest rated frequency. Linear equalizers provide linear attenuation, while cable equalizers provide sloped attenuation. GEQLs, NEQLs, and 7-TG862-WCs are linear equalizers. SEQs, 7-2E862/x-WCs, MEQs, and MEQTs are cable equalizers. Equalizers are available as both fixed (GEQL, NEQL, SEQ, 7-TG-862-WC, and 7-2E862/x-WC, and MEQ series) or thermal (MEQT series). All except the MEQ and MEQT series provide equalization in the forward path. Thermal equalizers provide level control in addition to equalization by slope-compensated insertion loss that changes with temperature for the amount of cable equalized.

### GEQL-1GHZ-xxx and GEQL-1GHZ-xxx-1 Series Linear Equalizers



P/N	P/N	Insertion Loss in dB at Frequency (MHz)										
		45	70	100	300	400	500	600	700	800	900	1002
GEQL-1GHZ-000	GEQL-1GHZ-000-1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
GEQL-1GHZ-020	GEQL-1GHZ-020-1	2.0	2.0	1.9	1.7	1.6	1.5	1.4	1.3	1.2	1.1	1.0
GEQL-1GHZ-030	GEQL-1GHZ-030-1	3.0	2.9	2.9	2.5	2.3	2.0	1.8	1.6	1.4	1.2	1.0
GEQL-1GHZ-040	GEQL-1GHZ-040-1	4.0	3.9	3.8	3.2	2.9	2.6	2.3	2.0	1.6	1.3	1.0
GEQL-1GHZ-050	GEQL-1GHZ-050-1	5.0	4.9	4.8	3.9	3.5	3.1	2.7	2.3	1.8	1.4	1.0
GEQL-1GHZ-060	GEQL-1GHZ-060-1	6.0	5.9	5.7	4.7	4.1	3.6	3.1	2.6	2.0	1.5	1.0
GEQL-1GHZ-070	GEQL-1GHZ-070-1	7.0	6.8	6.7	5.4	4.8	4.1	3.5	2.9	2.3	1.6	1.0
GEQL-1GHZ-080	GEQL-1GHZ-080-1	8.0	7.8	7.6	6.1	5.4	4.7	3.9	3.2	2.5	1.7	1.0
GEQL-1GHZ-090	GEQL-1GHZ-090-1	9.0	8.8	8.5	6.9	6.0	5.2	4.4	3.5	2.7	1.8	1.0
GEQL-1GHZ-100	GEQL-1GHZ-100-1	10.0	9.8	9.5	7.6	6.7	5.7	4.8	3.8	2.9	1.9	1.0
GEQL-1GHZ-110	GEQL-1GHZ-110-1	11.0	10.7	10.4	8.3	7.3	6.2	5.2	4.1	3.1	2.0	1.0
GEQL-1GHZ-120	GEQL-1GHZ-120-1	12.0	11.7	11.4	9.1	7.9	6.8	5.6	4.5	3.3	2.2	1.0
GEQL-1GHZ-130	GEQL-1GHZ-130-1	13.0	12.8	12.4	9.9	8.6	7.3	6.1	4.8	3.5	2.3	1.0

Input Return Loss: 18 dB min.

Specification Document Number

Output Return Loss: 18dB min.

1500202 Rev C

Passband Flatness:  $\pm 0.3$  dB (GEQL-1GHZ-000:  $\pm 0.15$  dB) Flatness measured with respect to gain slope

1502283 Rev A

Insertion loss for other frequencies can be determined on a linear tilt basis

All in red plastic

Specifications subject to change without notice

## GEQL-870 Series Linear Equalizers



P/N	P/N	Insertion Loss in dB at Frequency (MHz)										
		54	70	80	100	300	400	500	600	700	800	870
GEQL-870-020	GEQL-870-020-1	2.0	2.0	2.0	1.9	1.7	1.6	1.5	1.3	1.2	1.1	1.0
GEQL-870-030	GEQL-870-030-1	3.0	3.0	2.9	2.9	2.4	2.2	1.9	1.7	1.4	1.2	1.0
GEQL-870-040	GEQL-870-040-1	4.0	3.9	3.9	3.8	3.1	2.7	2.4	2.0	1.6	1.3	1.0
GEQL-870-050	GEQL-870-050-1	5.0	4.9	4.8	4.7	3.8	3.3	2.8	2.3	1.8	1.3	1.0
GEQL-870-060	GEQL-870-060-1	6.0	5.8	5.8	5.7	4.5	3.8	3.2	2.6	2.0	1.4	1.0
GEQL-870-070	GEQL-870-070-1	7.0	6.8	6.7	6.6	5.1	4.4	3.7	3.0	2.2	1.5	1.0
GEQL-870-080	GEQL-870-080-1	8.0	7.8	7.7	7.5	5.8	5	4.1	3.3	2.4	1.6	1.0
GEQL-870-090	GEQL-870-090-1	9.0	8.8	8.7	8.5	6.5	5.6	4.6	3.6	2.6	1.7	1.0
GEQL-870-100	GEQL-870-100-1	10.0	9.7	9.6	9.4	7.2	6.1	5.0	3.9	2.9	1.8	1.0
GEQL-870-110	GEQL-870-110-1	11.0	10.7	10.6	10.3	7.9	6.7	5.5	4.3	3.1	1.8	1.0
GEQL-870-120	GEQL-870-120-1	12.0	11.7	11.5	11.3	8.6	7.3	5.9	4.6	3.3	1.9	1.0
GEQL-870-130	GEQL-870-130-1	13.0	12.6	12.5	12.2	9.3	7.8	6.4	4.9	3.5	2.0	1.0

Input Return Loss: 18dB min.

Output Return Loss: 18dB min.

Passband Flatness:  $\pm 0.3$  dB

Impedance: 75 Ohms

Flatness measured with respect to slope.

Insertion loss for other frequencies can be determined on a linear tilt basis.

All in purple plastic.

Specification Document Number

1500774 Rev A,

1502284 Rev A

Specifications subject to change without notice

## NEQL-870 Series Linear Equalizers



Model	Insertion Loss in dB at Frequency (MHz)										
	54	70	80	100	300	400	500	600	700	800	870
NEQL-870-050	5.0	4.9	4.8	4.7	3.8	3.3	2.8	2.3	1.8	1.3	1.0
NEQL-870-060	6.0	5.8	5.8	5.7	4.5	3.8	3.2	2.6	2.0	1.4	1.0
NEQL-870-070	7.0	6.8	6.7	6.6	5.1	4.4	3.7	3.0	2.2	1.5	1.0
NEQL-870-080	8.0	7.8	7.7	7.5	5.8	5.0	4.1	3.3	2.4	1.6	1.0
NEQL-870-090	9.0	8.8	8.7	8.5	6.5	5.6	4.6	3.6	2.6	1.7	1.0
NEQL-870-100	10.0	9.7	9.6	9.4	7.2	6.1	5.0	3.9	2.9	1.8	1.0
NEQL-870-110	11.0	10.7	10.6	10.3	7.9	6.7	5.5	4.3	3.1	1.8	1.0
NEQL-870-120	12.0	11.7	11.5	11.3	8.6	7.3	5.9	4.6	3.3	1.9	1.0

Input Return Loss: 20dB min.


Output Return Loss: 20dB min.

Passband Flatness:  $\pm 0.3$  dB

All in yellow plastic

Specification Document Number 601264 Rev B

Specifications subject to change without notice



### 7-TG862-WC Series Linear Equalizers

Model	P/N	Insertion Loss in dB at Frequency (MHz)		Tilt in dB 45 to 890MHz
		50	862	
7-TG862/5-WC	2500826	5.0	1.0	5.2
7-TG862/6-WC	2500827	6.0	1.0	6.24
7-TG862/7-WC	2500828	7.0	1.0	7.28
7-TG862/8-WC	2500829	8.0	1.0	8.33
7-TG862/9-WC	2500830	9.0	1.0	9.37
7-TG862/10-WC	2500831	10.0	1.0	10.41
7-TG862/11-WC	2500832	11.0	1.0	11.45
7-TG862/12-WC	2500833	12.0	1.0	12.49
7-TG862/13-WC	2500852	11.0	1.0	13.52
7-TG862/14-WC	2500853	12.0	1.0	14.57
7-TG862/15-WC	2500854	11.0	1.0	15.61

Bandwidth: 45–890MHz


Specification Document Number 871539 Rev A

Insertion Loss: 1.2dB max.

Tilt: ±0.6dB from 50 to 862MHz; Flatness: ±0.2dB

Input Return Loss: 18dB min.; Output Return Loss: 18dB min.

Specifications subject to change without notice



### SEQ-1G Series Cable Equalizers

P/N	Insertion Loss in dB at Frequency (MHz)											*	
	54	85	105	222	350	450	550	650	750	870	1002		
SEQ-1G-0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
SEQ-1G-02	2.0	1.9	1.8	1.5	1.4	1.3	1.2	1.0	0.8	0.7	0.7	0.7	1.55
SEQ-1G-03	2.9	2.8	2.6	2.3	2.1	1.9	1.7	1.4	1.1	0.9	0.8	0.8	2.80
SEQ-1G-04	4.0	3.8	3.6	3.1	2.6	2.3	2.1	1.9	1.6	1.4	1.0	1.0	3.70
SEQ-1G-05	5.0	4.7	4.6	3.8	3.1	2.7	2.4	2.0	1.7	1.4	1.0	1.0	5.10
SEQ-1G-06	6.0	5.7	5.4	4.6	3.8	3.3	2.8	2.4	2.0	1.6	1.0	1.0	6.35
SEQ-1G-07	7.0	6.6	6.4	5.4	4.4	3.8	3.1	2.6	2.0	1.6	1.0	1.0	7.75
SEQ-1G-08	8.0	7.4	7.1	5.8	4.7	4.0	3.4	2.8	2.2	1.6	1.0	1.0	8.90
SEQ-1G-09	9.0	8.5	8.2	6.8	5.4	4.5	3.8	3.1	2.5	1.9	1.0	1.0	10.20
SEQ-1G-10	10.0	9.3	9.0	7.3	5.7	4.8	4.0	3.2	2.5	1.9	1.0	1.0	11.45
SEQ-1G-11	11.0	10.4	10.0	8.1	6.4	5.4	4.5	3.7	2.9	2.1	1.0	1.0	12.70
SEQ-1G-12	12.0	11.1	10.8	8.8	7.0	5.9	4.9	3.9	3.0	2.1	1.0	1.0	14.0
SEQ-1G-13	13.0	12.2	11.8	9.5	7.6	6.3	5.1	4.1	3.2	2.2	1.0	1.0	15.25
SEQ-1G-14	14.0	13.0	12.4	10.2	8.2	6.9	5.7	4.6	3.5	2.3	1.0	1.0	16.5
SEQ-1G-15	14.9	13.9	13.3	10.8	8.6	7.1	5.8	4.6	3.5	2.3	1.0	1.0	17.8
SEQ-1G-16	16.0	14.9	14.3	11.5	9.2	7.6	6.3	5.0	3.7	2.4	1.0	1.0	19.05
SEQ-1G-17	17.0	15.6	15.0	12.2	9.7	8.0	6.5	5.2	3.9	2.4	1.0	1.0	20.3
SEQ-1G-18	18.0	16.9	16.2	13.2	10.5	8.7	7.0	5.6	4.0	2.4	0.8	0.8	21.8
SEQ-1G-19	19.0	17.7	16.9	13.7	10/8	9.0	7.3	5.7	4.1	2.4	0.8	0.8	23.05
SEQ-1G-20	20.0	18.2	17.7	14.2	11.2	9.3	7.6	6.0	4.4	2.6	.8	.8	24.05

Passband Flatness: ±0.3 dB (SEQ-1G-02 to 18), ±0.4 dB (SEQ-1G-19 to 20)

\*dB of cable equalized at 1002MHz

Return Loss I/O: 18dB, min. (SEQ-1G-02 to 18), 16dB min. (SEQ-1G-19 to 20)

Specification: 1500769 Revision C

Specifications subject to change without notice

## 1 GHz Equalizer for CHP Max5000



P/N	Value
1300847	0
861020	0.5
861022	1.0
861024	1.5
1500944	3.0

## GEQC-870 Cable Equalizers



P/N	Insertion Loss in dB at Frequency (MHz)										
	45	54	70	80	222	400	500	600	700	800	870
GEQC-870-080	6.9	6.8	6.6	6.5	4.9	3.5	2.9	2.2	1.5	1.0	0.7

Notes:

1. Definition of cable signature is S-Parameter file cable loss "Times Fiber" T-10 .625" from equation.
2. dB per 100 feet is 1.87416.
3. Impedance: 75 ohm
4. Input Return Loss: 22 dB min.
5. Output Return Loss: 22 dB min.
6. Flatness:  $\pm 0.3$  dB.

Specification Document Number 1501842 Rev B

Specifications subject to change without notice

## SEQ-862 Series Cable Equalizers



Model	P/N	Insertion Loss in dB at Frequency (MHz)										dB of cable equalized at highest frequency
		54	70	80	222	500	600	700	800	862		
SEQ-0	162290-00	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
SEQ-862-02	162240-25	1.9	1.9	1.9	1.8	1.4	1.3	1.2	1.1	1.0	1.0	1.0
SEQ-862-03	162240-15	2.9	2.8	2.8	2.4	1.6	1.5	1.4	1.2	1.0	1.0	2.0
SEQ-862-04	162240-08	4.0	4.0	4.0	3.2	1.9	1.6	1.4	1.2	1.0	1.0	4.0
SEQ-862-05	162240-16	4.8	4.6	4.5	3.4	2.1	1.7	1.4	1.2	1.0	1.0	5.0
SEQ-862-06	162240-17	5.9	5.6	5.6	4.2	2.6	2.1	1.6	1.2	1.0	1.0	6.5
SEQ-862-07	162240-18	6.9	6.6	6.6	5.4	3.1	2.5	1.9	1.4	1.0	1.0	7.8
SEQ-862-08	162240-10	7.8	7.5	7.4	5.6	3.4	2.7	2.1	1.4	1.0	1.0	8.7
SEQ-862-09	162240-19	8.8	8.4	8.3	6.3	3.6	2.8	2.0	1.4	1.0	1.0	10.5
SEQ-862-10	162240-20	9.6	9.1	8.9	6.9	3.8	2.9	2.1	1.4	1.0	1.0	11.0
SEQ-862-11	162240-21	10.8	10.3	10.2	7.6	4.4	3.5	2.5	1.6	1.0	1.0	13.0
SEQ-862-12	162240-11	11.6	11.1	10.8	8.2	4.7	3.7	2.7	1.7	1.0	1.0	14.5
SEQ-862-13	162240-22	12.8	12.4	12.0	8.8	5.0	3.9	2.8	1.7	1.0	1.0	15.5
SEQ-862-14	162240-23	13.6	12.9	12.7	9.6	5.2	4.0	2.9	1.8	1.0	1.0	16.5
SEQ-862-15	162240-24	14.5	13.9	13.5	10.4	5.6	4.2	3.0	1.8	1.0	1.0	17.5
SEQ-862-16	162240-12	15.3	14.7	14.3	10.8	6.1	4.7	3.3	2.0	1.0	1.0	19.0
SEQ-862-17	162240-28	17.5	16.8	16.4	12.2	6.5	5.1	3.5	2.0	1.0	1.0	21.3
SEQ-862-18	162240-29	18.4	17.5	17.2	12.7	6.8	5.2	3.6	2.0	1.0	1.0	22.4
SEQ-862-19	162240-30	19.5	18.6	18.2	13.6	7.2	5.7	3.8	2.0	1.0	1.0	23.9
SEQ-862-20	162240-31	20.3	19.4	19.0	14.2	7.6	5.8	3.9	2.0	1.0	1.0	24.9

Passband Flatness:  $\pm 0.3$  dB

Specification Document Number 600438 Rev J

Return Loss I/O: 20/18 dB

Specifications subject to change without notice



### 7-2E862/x-WC Cable Equalizers

Model	P/N	Insertion Loss in dB at Frequency (MHz)								
		45	54	70	85	450	550	650	750	870
7-2E862/1-WC	2500808	1.3	1.3	1.2	1.2	0.8	0.7	0.6	0.6	0.5
7-2E862/2-WC	2500809	2.1	2.0	2.0	1.9	1.1	0.9	0.8	0.7	0.5
7-2E862/3-WC	2500810	2.9	2.8	2.7	2.6	1.4	1.2	0.9	0.7	0.5
7-2E862/4-WC	2500811	3.7	3.6	3.5	3.4	1.7	1.4	1.1	0.8	0.5
7-2E862/5-WC	2500812	4.5	4.4	4.2	4.1	2.0	1.6	1.2	0.9	0.5
7-2E862/6-WC	2500813	5.3	5.1	5.0	4.8	2.3	1.8	1.4	1.0	0.5
7-2E862/7-WC	2500814	6.1	5.9	5.7	5.5	2.6	2.1	1.5	1.0	0.5
7-2E862/8-WC	2500815	6.9	6.7	6.4	6.2	2.9	2.3	1.7	1.1	0.5
7-2E862/9-WC	2500816	7.7	7.4	7.2	6.9	3.2	2.5	1.8	1.2	0.5
7-2E862/10-WC	2500817	8.4	8.2	7.9	7.6	3.5	2.7	2.0	1.3	0.4
7-2E862/11-WC	2500818	9.2	9.0	8.7	8.4	3.8	2.9	2.1	1.3	0.4
7-2E862/12-WC	2500819	10.0	9.8	9.4	9.1	4.1	3.2	2.3	1.4	0.4
7-2E862/13-WC	2500820	10.8	10.5	10.1	9.8	4.4	3.4	2.4	1.5	0.4
7-2E862/14-WC	2500821	11.6	11.3	10.9	10.5	4.8	3.6	2.6	1.6	0.4
7-2E862/15-WC	2500822	12.4	12.1	11.6	11.2	5.1	3.8	2.7	1.6	0.4
7-2E862/16-WC	2500823	13.5	13.1	12.6	12.2	5.6	4.3	3.1	2.0	0.7
7-2E862/17-WC	2500824	14.3	13.9	13.4	12.9	5.9	4.5	3.2	2.0	0.7
7-2E862/18-WC	2500825	15.1	14.6	14.1	13.6	6.2	4.8	3.4	2.1	0.7
7-2E862/19-WC	2500981	15.8	15.4	14.8	14.3	6.5	5.0	3.5	2.2	0.7
7-2E862/20-WC	2500978	16.6	16.2	15.6	15.0	6.8	5.2	3.7	2.3	0.6
7-2E862/21-WC	2500982	17.4	17.0	16.3	15.7	7.1	5.4	3.8	2.3	0.6
7-2E862/22-WC	2500983	18.2	17.7	17.1	16.5	7.4	5.6	4.0	2.4	0.6
7-2E862/23-WC	2500979	19.0	18.5	17.8	17.2	7.7	5.9	4.1	2.5	0.6
7-2E862/24-WC	2500984	19.8	19.3	18.6	17.9	8.0	6.1	4.3	2.6	0.6
7-2E862/25-WC	2500985	20.6	20.1	19.3	18.6	8.3	6.3	4.4	2.6	0.6
7-2E862/26-WC	2500980	21.4	20.8	20.0	19.3	8.6	6.5	4.6	2.7	0.6

Specifications subject to change without notice

### E862 Equalizers

Model	P/N	Insertion Loss in dB at Frequency (MHz)	
		47	862
E862/02	PH0.40391	2	1
E862/04	PH0.40401	4	1
E862/06	PH0.40411	6	1
E862/08	PH0.40421	8	1
E862/10	PH1.40431	10	1
E862/12	PH0.40821	12	1
E862/14	PH0.40831	14	1
E862/16	PH0.40841	16	1

Passband Flatness:  $\pm 0.2$  dB

Return Loss: <20 dB (47 MHz)–1.5 dB/oct.

Specifications subject to change without notice



## SEQ-750 Series Cable Equalizers



Model	P/N	Insertion Loss in dB at Frequency (MHz)									equalized at highest frequency
		54	70	80	222	350	450	550	650	750	
SEQ-0	162290-00	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
SEQ-750-02	162389-02	2.0	2.0	2.0	1.8	1.4	1.3	1.3	1.2	1.0	1.5
SEQ-750-03	162389-03	3.0	2.8	2.7	2.4	1.9	1.7	1.5	1.3	1.0	2.5
SEQ-750-04	162389-04	3.9	3.9	3.8	3.1	2.4	2.0	1.7	1.4	1.0	4.0
SEQ-750-05	162389-05	4.9	4.6	4.5	3.5	2.9	2.3	1.8	1.4	1.0	5.0
SEQ-750-06	162389-06	5.9	5.7	5.6	4.2	3.3	2.7	2.0	1.5	1.0	6.5
SEQ-750-07	162389-07	7.0	6.8	6.6	5.0	3.6	2.8	2.0	1.6	1.0	8.0
SEQ-750-08	162389-08	8.0	7.9	7.6	5.5	4.2	3.3	2.5	1.8	1.0	9.0
SEQ-750-09	162389-09	9.0	8.8	8.6	6.3	4.8	3.8	2.7	2.0	1.0	10.5
SEQ-750-10	162389-10	9.8	9.4	9.2	6.7	5.0	3.8	2.8	2.0	1.0	12.0
SEQ-750-11	162389-11	11.0	10.5	10.2	7.5	5.5	4.2	3.0	2.0	1.0	13.5
SEQ-750-12	162389-12	11.8	11.3	11.0	8.1	6.0	4.6	3.3	2.2	1.0	14.5
SEQ-750-13	162389-13	12.9	12.4	12.2	8.9	6.6	5.1	3.7	2.5	1.0	16.0
SEQ-750-14	162389-14	14.0	13.5	13.2	9.7	6.9	5.3	3.8	2.5	1.0	17.0
SEQ-750-15	162389-15	14.9	14.3	13.9	10.1	7.5	5.8	4.3	2.6	1.0	18.5
SEQ-750-16	162389-16	15.8	14.9	14.5	10.5	8.0	6.1	4.4	2.7	1.0	20.0
SEQ-750-17	162389-17	16.8	16.0	15.6	11.3	8.2	6.2	4.4	2.6	1.0	21.0
SEQ-750-18	162389-18	17.9	17.1	16.6	11.9	8.6	6.6	4.6	2.6	1.0	22.4
SEQ-750-19	162389-19	18.8	17.8	17.4	12.3	9.1	6.9	4.8	2.7	1.0	23.7
SEQ-750-20	162389-20	19.8	19.0	18.5	13.2	9.5	7.2	5.0	2.8	1.0	25.0
SEQ-750-21	162389-21	20.8	19.8	19.3	13.4	10.0	7.5	5.2	2.9	1.0	26.3
SEQ-750-2-2	162433-02	2.8	2.8	2.8	2.5	2.3	2.2	2.1	2.1	2.0	1.1
SEQ-750-4-2	162469-02	4.5	4.4	4.3	3.6	3.1	2.8	2.5	2.2	2.0	3.3
SEQ-750-4-3	162469-03	5.5	5.4	5.3	4.7	4.1	3.8	3.5	3.2	3.0	3.3
SEQ-750-5-5	162469-05	8.9	8.6	8.6	7.6	6.9	6.3	5.8	5.4	5.0	5.0

Passband Flatness:  $\pm 0.3$  dB

Specification Document Number 600563 Revision J

Return Loss I/O: 18/16 dB

Specifications subject to change without notice



### MEQ-42 and MEQT-42 Series Return Cable Equalizers

Model	P/N	Insertion Loss in dB at Frequency (MHz)		dB of Cable Equalized at Frequency (MHz)					
		5	42	42	300	400	450	550	750
MEQ-42-2	162395-02	3.0	1.0	3.0	8.0	9.4	10.2	11.3	13.4
MEQ-42-3	162395-03	4.0	1.0	4.6	12.6	15.0	15.8	17.7	21.0
MEQ-42-4	162395-04	5.0	1.0	6.1	16.7	19.4	20.7	23.0	27.0
MEQ-42-5	162395-05	6.0	1.0	7.6	20.4	23.8	25.4	28.3	33.0
MEQ-42-6	162395-06	7.0	1.0	9.1	24.6	29.0	30.4	34.0	39.6
MEQ-42-7	162395-07	8.0	1.0	10.6	27.0	31.5	33.0	36.4	45.5
MEQT-42-2	162396-02	3.6	2.5	3.2	9.0	10.5	11.2	12.5	14.9
MEQT-42-3	162396-03	5.6	2.5	4.7	13.0	15.2	16.2	18.1	21.5
MEQT-42-4	162396-04	6.8	2.5	6.5	18.0	21.0	22.4	25.0	29.8
MEQT-42-5	162396-05	8.4	2.5	9.0	25.0	29.2	31.1	34.7	41.4
MEQT-42-6	162396-06	8.7	2.5	9.4	26.0	30.4	32.4	36.1	43.1
MEQT-42-7	162396-07	10.1	2.5	11.5	32.0	37.4	39.8	44.5	53.0

Passband Flatness: 0.2 dB, P-V (MEQ-42) 0.3 dB, P-V (MEQT-42)  
Return Loss I/O: 18/16 dB

MEQ-42 Specification Document Number 600540 Rev C

MEQT-42 Specification Document Number 600595 Rev D

Specifications subject to change without notice



### MEQ-55 and MEQT-55 Series Return Cable Equalizers

Model	P/N	Insertion Loss in dB at Frequency (MHz)		dB of cable equalized at Frequency (MHz)					
		5	55	55	300	400	450	550	750
MEQ-55-2	162464-02	1.9	1.0	1.2	3.0	3.5	3.7	4.2	5.0
MEQ-55-3	162464-03	2.7	1.0	2.5	6.0	7.0	7.5	8.3	9.9
MEQ-55-4	162464-04	3.6	1.0	3.7	9.0	10.5	11.2	12.5	14.9
MEQ-55-5	162464-05	4.5	1.0	4.9	12.0	14.0	14.9	16.7	19.9
MEQ-55-6	162464-06	5.6	1.0	6.6	16.0	18.7	19.9	22.2	26.5
MEQ-55-7	162464-07	6.8	1.0	8.2	20.0	23.4	24.9	27.8	33.1
MEQT-55-2	162465-02	4.2	2.5	2.5	6.0	7.0	7.5	8.3	9.9
MEQT-55-3	162465-03	5.1	2.5	3.7	9.0	10.5	11.2	12.5	14.9
MEQT-55-4	162465-04	6.0	2.5	4.9	12.0	14.0	14.9	16.7	19.9
MEQT-55-5	162465-05	7.1	2.5	6.6	16.0	18.7	19.9	22.2	26.5
MEQT-55-6	162465-06	8.3	2.5	8.2	20.0	23.4	24.9	27.8	33.1
MEQT-55-7	162465-07	9.5	2.5	9.9	24.0	28.0	29.9	33.3	39.8

Passband Flatness: 0.2 dB, P-V  
Return Loss I/O: 18/16 dB

MEQ-55 Specification Document Number 600695 Rev 50

MEQT-55 Specification Document Number 600696 Rev 50

Specifications subject to change without notice

## MEQ-65 and MEQT-65 Series Return Cable Equalizers



Model	P/N	Insertion Loss in dB at Frequency (MHz)		dB of Cable Equalized at Frequency (MHz)					
		5	65	65	300	400	450	550	750
MEQ-65-02	162434-02	2.0	1.0	1.3	3.0	3.5	3.7	4.2	5.0
MEQ-65-03	162434-03	2.9	1.0	2.7	6.0	7.0	7.5	8.3	9.9
MEQ-65-04	162434-04	3.9	1.0	4.0	9.0	10.5	11.2	12.5	14.9
MEQ-65-05	162434-05	5.2	1.0	5.8	13.0	15.2	16.2	18.1	21.5
MEQ-65-06	162434-06	6.2	1.0	7.1	16.0	18.7	19.9	22.2	26.5
MEQ-65-07	162434-07	7.1	1.0	8.5	19.0	22.2	23.6	26.4	31.5
MEQT-65-02	162435-02	4.4	2.5	2.7	6.0	7.0	7.5	8.3	9.9
MEQT-65-03	162435-03	5.4	2.5	4.0	9.0	10.5	11.2	12.5	14.9
MEQT-65-04	162435-04	6.7	2.5	5.8	13.0	15.2	16.2	18.1	21.5
MEQT-65-05	162435-05	7.7	2.5	7.1	16.0	18.7	19.9	22.2	26.5
MEQT-65-06	162435-06	8.6	2.5	8.5	19.0	22.2	23.6	26.4	31.5
MEQT-65-07	162435-07	9.6	2.5	9.8	22.0	25.7	27.4	30.6	36.4

Passband Flatness: MEQ-65 ( $\pm 0.1$  dB) MEQT-65 ( $\pm 0.2$  dB)

MEQ-65 Specification Document Number 600615 Rev B

Return Loss I/O: 18/16 dB

MEQT-65 Specification Document Number 600616 Rev B

Specifications subject to change without notice

## E606

Picture  
Coming  
soon

P/N	PAD Value	Insertion Loss in dB at Frequency (MHz)	
		47	606
PH0.42171	2	2	1
PH0.42161	4	4	1
PH0.42151	6	6	1
PH0.41052	8	8	1
PH0.41062	10	10	1
PH0.41072	12	12	1
PH0.41082	14	14	1
PH0.41092	16	16	1

Passband Flatness: (2–16 dB)  $\pm 0.2$  dB, (18–20 dB)  $\pm 0.25$  dB

Return Loss: <20 dB (47 MHz)–1.5 dB/oct.

Dimensions in L x H: 30 x 37.7 mm

All in blue plastic.

Specifications subject to change without notice

**7-REF42/x-WC**



P/N	PAD Value	Insertion Loss in dB at Frequency (MHz)							
		5	7	13	19	25	33	42	
7-REF42/1-WC	1	1.4	1.3	1.1	1.0	0.9	0.8	0.7	
7-REF42/2-WC	2	1.8	1.7	1.4	1.1	1.0	0.8	0.7	
7-REF42/3-WC	3	2.6	2.4	2.0	1.6	1.4	1.0	0.7	
7-REF42/4-WC	4	3.4	3.1	2.6	2.2	1.7	1.2	0.7	
7-REF42/5-WC	5	4.1	3.7	3.1	2.5	2.0	1.4	0.7	
7-REF42/6-WC	6	4.6	4.1	3.4	2.7	2.2	1.3	0.7	
7-REF42/7-WC	7	5.3	5.0	4.0	3.2	2.4	1.5	0.7	
7-REF42/8-WC	8	6.0	5.4	4.2	3.5	2.6	1.6	0.7	
7-REF42/9-WC	9	6.6	5.8	4.7	3.7	2.7	1.7	0.7	

All in blue plastic.

Specifications subject to change without notice

**7-REF55/x-WC**



P/N	PAD Value	Insertion Loss in dB at Frequency (MHz)								
		5	7	13	19	25	33	42	49	55
7-REF55/1-WC	1	1.2	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.4
7-REF55/2-WC	2	1.8	1.7	1.5	1.3	0.9	0.7	0.6	0.5	0.4
7-REF55/3-WC	3	2.3	2.2	1.8	1.5	1.3	0.9	0.6	0.3	0.4
7-REF55/4-WC	4	3.3	3.0	2.6	2.2	1.8	1.4	1.0	0.8	0.5
7-REF55/5-WC	5	4.1	3.8	3.2	2.7	2.2	1.7	1.2	0.9	0.5
7-REF55/6-WC	6	4.8	4.4	3.7	3.0	2.5	2.0	1.3	0.9	0.5
7-REF55/7-WC	7	5.2	4.8	3.9	3.2	2.7	2.1	1.4	1.0	0.5
7-REF55/8-WC	8	6.2	5.7	4.7	4.0	3.2	2.4	1.6	1.0	0.6
7-REF55/9-WC	9	6.9	6.3	5.3	4.4	3.5	2.7	1.8	1.3	0.6
7-REF55/10-WC	10	7.6	7.0	5.7	4.8	3.7	2.9	1.9	1.3	0.6
7-REF55/11-WC	11	8.4	7.7	6.3	5.2	4.2	3.0	2.0	1.3	0.6

All in blue plastic.

Specifications subject to change without notice

**7-REF65/x-WC**




P/N	PAD Value	Insertion Loss in dB at Frequency (MHz)								
		5	8	20	29	36	42	56	63	65
7-REF65/1-WC	1	1.3	1.2	1.0	0.9	0.8	0.7	0.6	0.6	0.6
7-REF65/2-WC	2	2.1	1.9	1.5	1.3	1.2	1.0	0.7	0.7	0.6
7-REF65/3-WC	3	2.7	2.5	2.2	1.9	1.5	1.1	0.7	0.7	0.6
7-REF65/4-WC	4	3.5	3.2	2.7	2.4	1.9	1.3	0.8	0.7	0.6
7-REF65/5-WC	5	4.2	3.8	3.2	2.5	2.1	1.5	0.9	0.7	0.6
7-REF65/6-WC	6	4.8	4.1	3.2	2.8	2.2	1.6	1.1	0.7	0.6
7-REF65/7-WC	7	5.8	5.3	3.9	3.0	2.5	2.1	1.3	0.9	0.6
7-REF65/8-WC	8	6.5	5.8	4.2	3.6	2.7	2.2	1.3	1.0	0.6
7-REF65/9-WC	9	6.9	6.2	5.0	3.8	3.0	2.2	1.4	1.0	0.6
7-REF65/10-WC	10	8.0	7.1	5.2	4.0	3.2	2.7	1.5	1.0	0.6
7-REF65/11-WC	11	8.6	7.9	5.6	4.4	3.4	2.8	1.5	1.0	0.6

All in blue plastic.

Specifications subject to change without notice

## Cable Simulators and Cable Equivalentts

Cable simulators provide sloped attenuation of RF signals with the greatest attenuation occurring at the highest frequency. They are plug-in fixed units, which are used in place of equalizers in the forward path in those cases where the cable spacing is less than the amount of equalization built into the amplifier.



### SCS-1G Series Cable Simulators

P/N	Insertion Loss in dB at Frequency (MHz)								dB of Cable Simulated at Frequency (MHz)							
	50	70	80	550	750	806	862	1002	350	450	550	650	750	806	862	1002
SCS-1G-02	1.0	1.0	1.1	1.6	1.8	1.9	1.9	2.0	0.7	0.8	1.0	1.1	1.2	1.2	1.3	1.3
SCS-1G-03	1.0	1.1	1.1	2.3	2.6	2.7	2.8	3.0	1.5	1.7	1.9	2.2	2.3	2.5	2.6	2.5
SCS-1G-04	1.0	1.1	1.2	2.9	3.4	3.6	3.7	4.0	2.2	2.6	2.9	3.2	3.5	3.8	3.9	3.8
SCS-1G-05	1.0	1.2	1.3	3.6	4.3	4.4	4.6	5.0	2.9	3.4	3.9	4.3	4.7	5.0	5.2	5.0
SCS-1G-06	1.0	1.2	1.3	4.2	5.1	5.3	5.5	6.0	3.6	4.2	4.8	5.3	5.7	6.2	6.4	6.3
SCS-1G-07	1.0	1.3	1.4	4.9	5.9	6.2	6.4	7.0	4.7	5.4	6.0	6.6	7.1	7.4	7.7	7.6
SCS-1G-08	1.0	1.3	1.5	5.5	6.7	7.0	7.3	8.0	5.4	6.2	6.9	7.6	8.2	8.6	8.9	8.8
SCS-1G-09	1.0	1.4	1.5	6.1	7.5	7.9	8.2	9.0	6.2	7.1	7.9	8.7	9.4	9.8	10.2	10.0
SCS-1G-10	1.0	1.4	1.6	6.8	8.3	8.7	9.1	10.0	7.0	8.0	8.9	9.8	10.6	11.1	11.5	11.3
SCS-1G-11	1.0	1.5	1.7	7.4	9.2	9.6	10.0	11.0	7.8	8.9	9.9	10.9	11.8	12.3	12.8	12.5
SCS-1G-12	1.0	1.5	1.7	8.1	10.0	10.5	10.9	12.0	8.5	9.8	11.0	12.0	13.1	13.6	14.1	13.8

Passband Flatness: 0.4dB, P-V

Specification 1500883 Rev A

Return Loss I/O: 18/16dB

Specifications subject to change without notice



### SCS-862 Series Cable Simulators

Model	P/N	Insertion Loss in dB at Frequency (MHz)								dB of Cable Simulated at Frequency (MHz)					
		54	70	80	222	550	750	806	862	300	450	550	750	806	862
SCS-862-02	162451-02	1.0	1.0	1.0	1.3	1.7	1.9	2.0	2.0	0.7	0.8	1.0	1.2	1.2	1.3
SCS-862-03	162451-03	1.0	1.0	1.0	1.6	2.4	2.8	2.9	3.0	1.3	1.7	1.9	2.3	2.5	2.6
SCS-862-04	162451-04	1.0	1.1	1.2	1.9	3.2	3.8	3.9	4.0	2.0	2.6	2.9	3.5	3.8	3.9
SCS-862-05	162451-05	1.0	1.0	1.1	2.3	3.9	4.7	4.9	5.0	2.7	3.4	3.9	4.7	5.0	5.2
SCS-862-06	162451-06	1.0	1.0	1.2	2.6	4.6	5.5	5.8	6.0	3.3	4.2	4.8	5.7	6.2	6.4
SCS-862-07	162451-07	1.0	1.2	1.4	3.1	5.2	6.3	6.6	7.0	4.3	5.4	6.0	7.1	7.4	7.7
SCS-862-08	162451-08	1.0	1.3	1.4	3.3	6.0	7.3	7.6	8.0	5.0	6.2	6.9	8.2	8.6	8.9
SCS-862-09	162451-09	1.0	1.3	1.6	3.7	6.6	8.1	8.5	9.0	5.7	7.1	7.9	9.4	9.8	10.2
SCS-862-10	162451-10	1.0	1.4	1.6	3.9	7.3	9.0	9.4	10.0	6.4	8.0	8.9	10.6	11.1	11.5
SCS-862-11	162451-11	1.0	1.5	1.7	4.4	8.0	10.0	10.3	11.0	7.1	8.9	9.9	11.8	12.3	12.8
SCS-862-12	162451-12	1.0	1.5	1.7	4.8	8.7	10.9	11.4	12.0	7.9	9.8	11.0	13.1	13.6	14.1
SCS-862-13	162451-13	1.0	1.5	1.8	5	9.5	11.9	12.4	13.0	8.6	10.7	12.0	14.3	14.8	15.4
SCS-862-14	162451-14	1.0	1.6	1.9	5.5	10.0	12.9	13.4	14.0	9.3	11.5	12.9	15.4	16.0	16.6
SCS-862-15	162451-15	1.0	1.7	2.0	5.9	10.6	13.7	14.3	15.0	10.0	12.4	13.9	16.6	17.3	17.9

Passband Flatness: 0.4dB, P-V (-2 through -13); 0.6 dB, P-V (-14 and -15)

Specification Document Number 600662 Rev B

Return Loss I/O: 8/16dB (-2 through -13); 16/16 dB (-14 and -15)

Specifications subject to change without notice




**SCS-750 Series Cable Simulators**

Model	P/N	Insertion Loss in dB at Frequency (MHz)									dB of Cable Simulated at Freq. (MHz)				
		54	70	80	222	350	450	550	650	750	350	450	550	650	750
SCS-750-02	162391-02	1.0	1.0	1.0	1.3	1.5	1.6	1.7	1.8	1.8	0.7	0.8	0.9	1.0	1.1
SCS-750-03	162391-03	1.0	1.0	1.0	1.6	2.0	2.2	2.4	2.6	2.8	1.5	1.7	1.9	2.1	2.3
SCS-750-04	162391-04	1.0	1.0	1.1	1.9	2.4	2.7	3.0	3.3	3.5	2.2	2.5	2.8	3.0	3.3
SCS-750-05	162391-05	1.0	1.1	1.2	2.3	3.0	3.4	3.9	4.3	4.6	3.2	3.6	4.0	4.4	4.8
SCS-750-06	162391-06	1.0	1.1	1.3	3.1	3.9	4.5	5.1	5.7	6.2	4.6	5.2	5.8	6.4	7.0
SCS-750-07	162391-07	1.0	1.1	1.3	3.3	4.2	4.9	5.6	6.2	6.8	5.0	5.7	6.4	7.0	7.6
SCS-750-08	162391-08	1.0	1.1	1.5	3.4	4.7	5.6	6.3	7.1	7.8	5.9	6.7	7.5	8.2	9.0
SCS-750-09	162391-09	1.0	1.2	1.5	4.0	5.4	6.4	7.3	8.2	9.0	6.9	7.9	8.8	9.7	10.5
SCS-750-10	162391-10	1.0	1.2	1.5	4.1	5.7	6.7	7.7	8.7	9.5	7.4	8.4	9.4	10.4	11.2
SCS-750-11	162391-11	1.0	1.2	1.5	4.3	6.4	7.6	8.7	9.8	10.7	8.4	9.6	10.7	11.9	12.8
SCS-750-12	162391-12	1.1	1.6	2.0	5.1	7.0	8.3	9.5	10.7	11.8	9.4	10.7	11.9	13.2	14.2
SCS-750-13	162391-13	1.1	1.6	2.0	5.4	7.5	8.9	10.2	11.6	12.7	10.1	11.6	12.9	14.3	15.4
SCS-750-14	162391-14	1.1	1.6	1.7	5.7	8.2	9.8	11.3	12.8	14.1	11.3	12.9	14.4	15.9	17.2
SCS-750-15	162391-15	1.1	1.6	1.7	5.8	8.7	10.4	12.0	13.6	15.0	12.1	13.8	15.4	17.0	18.4

Passband Flatness: 0.6dB, P-V  
Return Loss I/O: 18/16dB

Specification Document Number 600647 Revision B

Specifications subject to change without notice



**7-2E862Cx-WC Cable Simulators**

Model	P/N	Insertion Loss in dB at Frequency (MHz)								
		45	54	70	85	450	550	650	750	870
7-2E862C1-WC	2500834	0.2	0.2	0.3	0.3	0.7	0.8	0.8	0.9	1.0
7-2E862C2-WC	2500835	0.2	0.2	0.3	0.4	1.2	1.3	1.5	1.6	1.8
7-2E862C3-WC	2500836	0.2	0.3	0.4	0.4	1.7	1.9	2.1	2.4	2.6
7-2E862C4-WC	2500837	0.2	0.3	0.4	0.5	2.2	2.5	2.8	3.1	3.4
7-2E862C5-WC	2500838	0.3	0.5	0.6	0.7	2.8	3.2	3.6	3.9	4.3
7-2E862C6-WC	2500839	0.6	0.8	1.0	1.1	3.6	4.1	4.5	5.0	5.4
7-2E862C7-WC	2500840	0.7	0.9	1.1	1.3	4.2	4.8	5.3	5.8	6.3
7-2E862C8-WC	2500841	0.9	1.1	1.3	1.5	4.8	5.5	6.1	6.6	7.3
7-2E862C9-WC	2500842	1.1	1.3	1.6	1.8	5.5	6.2	6.9	7.6	8.3
7-2E862C10-WC	2500843	1.3	1.5	1.8	2.1	6.2	7.0	7.8	8.5	9.3
7-2E862C11-WC	2500844	1.5	1.7	2.1	2.4	6.9	7.8	8.6	9.4	10.3
7-2E862C12-WC	2500845	1.7	2.0	2.3	2.7	7.6	8.6	9.5	10.3	11.3

Specifications subject to change without notice

## CE862 Cable Equivalent

Model	P/N	Insertion Loss	
		47 MHz	862 MHz
CE862/2	PH0.42351	1	2
CE862/4	PH0.42361	1	4
CE862/6	PH0.42371	1	6
CE862/8	PH0.42381	1	8



Specifications subject to change without notice

## Input configuration modules and Output Distribution Accessories

Directional couplers, also known as TAPs, split the RF signal into unequal portions, routing the low loss and high loss signals to different legs of the plug-in location. By rotating SDC8, SDC12, 7-DC-8, and 7-DC-12 180°, the signal flow is reversed. Splitters deliver half the RF signal to each leg of the plug-in location. The SPB-0 and NPB-0 are throughput plug-ins that do not effect the signal.

### Splitter

Model	P/N
S3.5/3.5	PH0.40131



Bandwidth: 5-862MHz  
 Insertion Loss: 2 x 3.8dB (max., 862MHz)  
 Flatness:  $\pm 0.25$  dB  
 Return Loss: >20dB (47MHz) to 1.5dB/oct. (>20dB (<47MHz))  
 Isolation (out 1-out 2): >20dB  
 Dimensions L x H: 30 x 37.7 mm

Specifications subject to change without notice.

### Directional Coupler

Model	P/N	Insertion Loss: Out 1/Out 2, dB
TAP10/1	KF312679	10.5/1.5
TAP1/10	KF312689	1.5/10.5
TAP8/1.5	ph0.40491	2/8.5
TAP16/1	KF313121	16.5/1
TAP1/16	KF313124	1/16.5



Bandwidth: 5-862MHz  
 Flatness:  $\pm 0.25$  dB  
 Return Loss: >20dB (47MHz) to 1.5dB/oct. (>20dB (<47MHz))  
 Isolation (out 1-out 2): >20dB  
 Dimensions L x H: 30 x 37.7 mm

Specifications are subject to change without notice.

### Splitters and Directional Couplers (TAPs)



Model	P/N	Description	Insertion Loss
7-DC-4-5-870-WC	2501157	Splitter	4/4 dB
7-DC-8-5-870-WC	2501158	Directional coupler (TAP)	8/2.6 dB ( $\pm 0.5$ dB)
7-DC-12-5-870-WC	2501159	Directional coupler (TAP)	11.9/1.8 dB ( $\pm 0.5$ dB)

Specifications subject to change without notice

### S-Series Distribution Accessories



Accessory	P/N	Description	Insertion Loss in dB at Frequency (MHz)										
			5	40	54	70	80	222	550	750	862	1002	
NPB-0	NPB-xxx	jumper	0	0	0	0	0	0	0	0	0	0	0
SPB-0	162260-xx	jumper	0	0	0	0	0	0	0	0	0	0	0
SS-1000-2	162399-01	splitter	3.5	3.3	3.3	3.3	3.3	3.5	3.7	3.8	4.0	4.0	
SDC-1000-8	162400-01	directional	1.6	1.4	1.4	1.4	1.5	1.6	1.8	2.0	2.6	2.7	
		coupler	8.2	8.1	8.1	8.1	8.1	8.2	8.2	8.2	8.5	8.6	
SDC-1000-12	162400-02	directional	0.9	0.7	0.7	0.7	0.7	0.8	1.0	1.3	1.7	1.8	
		coupler	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.4	12.5	

Passband Flatness: 0.5 dB, P-V

Specification Document Number 600613 Revision F

The recessed groove indicates the high loss leg. These accessories are reversible.

Specifications subject to change without notice

### Diplex Filters

Diplex filters split the RF frequency, routing the low frequency to the return path and the high frequency to the forward path, with minimal signal loss. Select the diplex filter with the same frequency split as your network.



### Diplex Filter

Model	P/N
D30/47	PH0.40031
D42/54	1142134
D55/70	KF312012
D65/85	PH0.40063

Specifications subject to change without notice

## Active and Passive Return Channel Amplifier

The module RCA3-Z is a universal reverse path amplifier for Flex Max 400 and Flex Max 500 amplifiers. The functional adjustment possibilities enable a universal usage in HFC networks. All adjustments can be performed by Amini PADs. A switchable attenuator enables a reduction of the gain by 6dB. The roll off caused by the diplex filters is compensated by special circuitry, where the gain at the higher frequency is increased by 1.5dB. The whole range from 5 MHz to 30/42/65MHz can be used for reverse path signals.




### Active Return Channel Amplifiers

Model	P/N
RCA3-Z 25/65	KF310168
RCA3-Z 25/55	KF312011
RCA3-Z 25/42	KF310164
RCA3-Z 25/30	KF310160
Bandwidth	5–30MHz
Gain (module input to output)	
Flatness	±0.25 dB
Combiner insertion loss	<4.5dB
Return Loss	≤20dB
Noise Figure	<6dB
Attenuator	
Input/Output	Amini plug-in modules 0,1,2,...20dB
Interstage	(switchable with a Jumper) 0,6dB
Equalizer (5-65 MHz)	Amini plug-in modules 0,1,2,...20dB
Power Consumption	<1.5W
Power Supply	24VDC/60mA
Operating Temperature	-20°C to 75°C
Dimensions L x H	75 x 42 mm

Specifications subject to change without notice

### Passive Return Channel Equalizer

Model	P/N
RCEQ-Z-2/65	1096615
Bandwidth	5–65 MHz
Return Loss	≤20 dB
Insertion Loss: 1 input/2 input config.	≤1.0dB @ 65MHz/≤5.0dB @ 65MHz
Slope: delta insertion loss (5–65 MHz)	Amini plug-in modules (1dB steps) 0–20 dB (measured in station Max-Amplif. incl. D65/85 MHz)
flatness:	≤0.25 dB
Attenuator	Amini plug-in modules (1dB steps)
Power Consumption	<1.5W
Input Splitter	on board 1 input/2 input config. via bridges
Dimensions L x H	75 x 42 mm



Specifications subject to change without notice

## Automatic Gain Control (AGC) Modules

### AGC Modules

Model	P/N
AGC030/191.25	1186424
AGC030/189.25	1116534
AGC030/182.25	1129859
AGC030/175.25	1300238

Specifications subject to change without notice



## Frequency Correction Modules

Within a longer cascade of amplifiers and passive network components it can be necessary to correct irregularities of the frequency response. The CM862/xx is a plug-in module that equalizes the frequency response of longer cascades or non-optimal transmitter-node combinations with two bumpers and two debumpers, which can be shifted in frequency and amplitude. One of each is responsible for the high and low frequency ranges. An additional fixed bump in the CM862/85MHz, CM862/54MHz, and CM862/47MHz modules compensates the roll off of 4 diplexers (i.e. one CM862 is enough for 2 amplifiers).

### CM862 System Equalizer

Model	P/N
CM862/00	KF311194
CM862/85	1300573
CM862/54	KF311189
CM862/47	KF310661

Specifications subject to change without notice



## Reference Carrier Generator Modules

### Reference Carrier Generator

Model	P/N
RCG-65	1177640
RCG-42	1300505

Specifications subject to change without notice

Picture  
Coming  
soon

#### Americas Headquarters

60 Decibel Road • State College • Pennsylvania • 16801 • USA  
T: 1-814-238-2461 T: 1-800-233-2267 F: 1-814-238-4065

#### EuroPacific Headquarters

Transistorstraat 44-V • 1322 CG Almere • The Netherlands  
T: 31-36-546 1111 F: 31-36-536 4255

The C-COR logo is a registered trademark of C-COR Incorporated.  
Copyright © 2007 C-COR Incorporated. All rights reserved.

